

AD A050120

NRL Memorandum Report 3657

Summary Report
Pulse Applications and Parameter
Identification for U.S. Navy
Medium-Weight Shock Machine

Prepared for

Department of the Navy
Naval Research Laboratory
Washington, D.C.

by


Agbabian Associates
El Segundo, California

November 1977

This work was sponsored by the Defense Nuclear Agency under subtask Y99QAXSF503, work unit 05, and work unit title Mechanical Impedance Measurement, with CFEA 03511 of Naval Sea Systems Command as a secondary manager.



NAVAL RESEARCH LABORATORY
Washington, D.C.

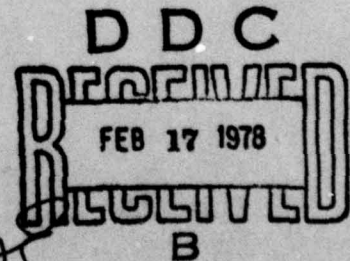


AU NO.
DDC FILE COPY

adi 000083

12

DISCLAIMER NOTICE

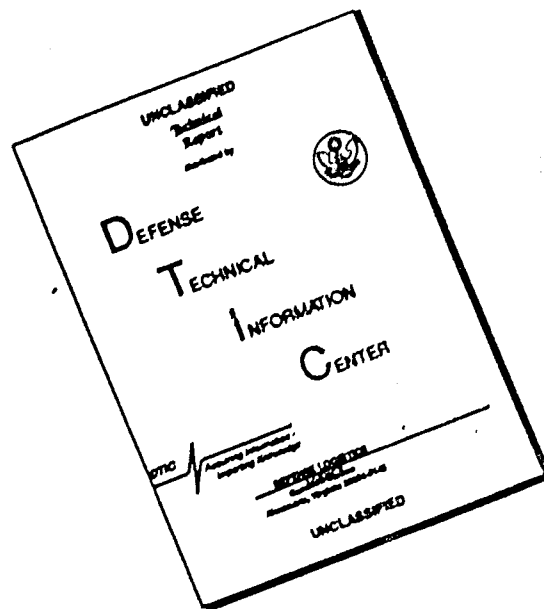

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 8657	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PULSE APPLICATIONS AND PARAMETER IDENTIFICATION FOR U.S. NAVY MEDIUM-WEIGHT SHOCK MACHINE	5. TYPE OF REPORT & PERIOD COVERED Summary report	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Agbabian Associates El Segundo, California	8. CONTRACT OR GRANT NUMBER(s) N00173-76-C-0249	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, D.C. 20375	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT 62704H Y99QAXSF503 Work Unit 05	
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Nuclear Agency SSPS Division Washington, D.C. 20305	12. REPORT DATE November 1977	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Defense Nuclear Agency SSPS Division Washington, D.C. 20305	13. MONITORING AGENCY 58 15. SECURITY CLASS. (of this report) UNCLASSIFIED	
16. DISTRIBUTION STATEMENT (of this Report) DISTRIBUTION STATEMENT A Approved for public release; Distribution Unlimited		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) NRL, SBIE MR-3657, AD-E000083		
18. SUPPLEMENTARY NOTES This work was sponsored by the Defense Nuclear Agency under subtask Y99QAXSF503, work unit 05, and work unit title Mechanical Impedance Measurement, with CFEA 03511 of Naval Sea Systems Command as a secondary manager.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Structural simulation Mechanical impedance/mobility Shipboard shock		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report summarizes the results of a study on pulse applications and parameter identification for the U.S. Navy medium-weight shock machine.		

DDC
RECEIVED
FEB 17 1978
B

DD FORM 1473
1 JAN 73EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

407 844. JOB

PREFACE

This report presents the results of a study on pulse applications and parameter identification for the U.S. Navy medium-weight shock machine. G.J. O'Hara was project manager for the Naval Research Laboratory. F.B. Safford was principal investigator for Agbabian Associates and was author of this report.

R.O. Belsheim, NRL (now with NKF Engineering) furnished technical information in the loading effects of equipment on structural motions. Professor S.F. Masri, University of Southern California, performed the investigations on parameter identification.

This work was supported by Defense Nuclear Agency under DNA subtask Y99QAXSF503, Work Unit 05, Title Mechanical Impedance Measurement.

ACCESSION for	
NTIS	Write Section <input checked="" type="checkbox"/>
DDC	Brief Section <input type="checkbox"/>
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

CONTENTS

<u>Section</u>		<u>Page</u>
1	INTRODUCTION	1
	1.1 Background	1
	1.2 Scope	2
2	MECHANICAL FORCE-PULSE GENERATOR	3
	2.1 Requirements	3
	2.2 Principle of Operation	6
	2.3 Pulse Devices	8
	2.4 NRL Pulse Generating System	15
3	U.S. NAVY MEDIUM-WEIGHT SHOCK MACHINE PARAMETER IDENTIFICATION	23
	3.1 Shock Machine and Test Article	23
	3.2 Parameter Identification	30
4.	REFERENCES	38

ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	Optimum Response Simulation of Multidegree Systems by Pulse Excitation	4
2	Pulse-Forming Device with Driving and Control System	7
3	Force Time-History Output of Device	7
4	Experimental Test for Mechanical Pulse Generator.	9
5	Cutting Fixture with Mandrel Tool Holder, Right; Bearing Guide Plate on Mandrel, Center; and Output Plate, Left	10
6	Pulse-Test Configuration for Control Room Platform Showing One of Four Units Required . . .	11
7	Control Room Platform: Acceleration-Time Histories of Predicted, Pulse-Simulated, and Pulse-Tested Motions	12
8	Medium-Force Pulse Generator Mounted on EDC Structure	13
9	Oscillograph Records Amplitude Histories of Drop Carriage and EDC Structure Response	14
10	Outline Drawing of NRL Pulse Generator	16
11	Calibration Mandrel for NRL Pulse Generator . . .	17
12	Frequency Transform of Force-Pulse Input for 12-Pulse Calibration Mandrel	18
13	Frequency Transform of Force-Pulse Input for 3-Pulse Train	19
14	Schematic of Pulse Generator System	20
15	U.S. Navy High-Impact Shock Machine for Medium-Weight Equipment with Mounted Test Structure	21
16	Shock Machine Anvil with and without Test Structure Using Pulse-Drive System	22

ILLUSTRATIONS (CONTINUED)

<u>Figure</u>		<u>Page</u>
17	Impedance Measurements of Shock Machine and Test Structure	25
18	Output Impedance Anvil (Z_{22}) of Medium-Weight Shock Machine	26
19	Input Impedance Test Article (Z_{33})	27
20	Shock Spectra Velocity of Anvil and Test Article.	28
21	Driving Point Impedance Tests of a Reinforced-Concrete Structure at Attachment Location of a Shock Isolator	29
22	Adaptive Step Size Search, Both Wide Range and Precision, for Rapid Convergence of Cost Function	33
23	Generation of Pulse Train to Match Criterion Frequency Spectrum Adaptive Random Search Compared to Nonadaptive	35
24	Shock Spectrum Response of Anvil and Test Article Using Identified Parameters	37

TABLES

<u>Table</u>		
1	Model Parameters of Anvil and Test Article . . .	36

PULSE APPLICATIONS AND PARAMETER IDENTIFICATION FOR U.S. NAVY MEDIUM-WEIGHT SHOCK MACHINE

SECTION 1

INTRODUCTION

1.1 BACKGROUND

The U.S. Navy medium-weight shock machine has played a paramount role over the past 30 years in the hardening of shipboard equipment to shock loads. Shock loading of shipboard equipment originates from depth charges, conventional and nuclear bombs, torpedoes, and missiles. Supplementing the shock machines, shock barges were subsequently placed into service by which equipment mounted in the barges were subjected to underwater detonations.

The combination of the shock test machines and the shock barge has proved singularly effective in the upgrading and qualification of equipment to specified hardness levels in a broad sense. However, rapid changes in naval warfare require more refined test/analyses and continuous improvements thereof. These improvements are necessary to meet the ever-increasing threats caused by technical change, particularly those due to the improving detection and accuracy of offensive weapons systems. Balanced hardness in a naval weapons system is becoming a more critical requirement to enhance survivability and operability, both during and after an attack.

Failures and malfunctions of both equipment and structure closely correlate to threat time-histories. This correlation motivates the continuing need for test simulation ever more closely approximating threat environments. The invention and development of a high-force output mechanical pulse generator (Refs. 1, 2) showed considerable promise in inducing structural motions simulating those motions induced by threats. The use of a mechanical-force pulse generator with the U.S. Navy medium-weight shock machine should extend test machine applications and provide for a more flexible transient shock capability.

Another critical area in need of development is an accurate description of the structural load paths between input threat and the mounting locations of operational and weapons-system equipment. With an adequate

Note: Manuscript submitted November 7, 1977.

structural description, the motions at equipment mounting generated by an attack may be predicted and the structural path can be analyzed for methods mitigating shock transmission. Obtaining the appropriate transmitted shock time-histories at the mounting points of equipment permits hardening of the equipment. One of the better and more practical descriptions of the structural load paths is impedance and mobility. The severity of postulated attacks will range from linear into varying degrees of the nonlinear regions such that high-force-level impedance measurements are required. The high-force levels are required for impedance measurements in a quasi-linear sense or for the formation of nonlinear functionals. Electrodynamic shakers are available with high-force outputs, and the mechanical force pulse generator discussed in the previous paragraph may also be used.

Impedance measurements may be used to extract the normal modes, damping, and resonant frequencies of a structure. Another approach to handling impedance measurements is the conversion from their nonparametric form to parametric form. In this latter procedure, parameters are identified for each structural path measured, and represent a coupled and distributed system. Representation of impedance in parametric form provides additional opportunities for design changes or modifications for shock transmission mitigation.

1.2 SCOPE

→ The scope of this study covers the following two objectives:

- Provide the design for a mechanical-force pulse generator, specify associated hydraulic power unit and controls, and provide pulse-train profiles and mandrels; ^{and} The force-pulse system will be designed for use with the U.S. Navy medium-weight shock machines and for use in measurements of impedance.
- → Perform an exploratory parametric identification study of U.S. Navy medium-weight shock machine, test article, and impact loads using NRL-furnished data. → Determine equivalent system model and associated parameters.

SECTION 2

MECHANICAL FORCE-PULSE GENERATOR

2.1 REQUIREMENTS

Transient shock tests on equipment and systems to simulate the motions induced by a conventional explosive or nuclear attack are largely limited to single-axis test machines. Further limitations exist in the size and weight of equipment that can be tested. Simulating multiaxis loading on large equipment with many degrees of freedom represents a difficult problem, as it is impractical to generate continuously varying forces of sufficient magnitude. This problem becomes extremely difficult or impossible where in-place or field tests are required. On the other hand, short duration forces of large magnitudes over a wide frequency range can be generated by mechanical pulse generators. Since a discrete number of pulses superficially presents an appearance quite different from a continuous excitation signal, it becomes necessary to select the pulses in such a way that the resulting vibration of the structure matches as closely as possible the response (e.g., displacement, velocity, or acceleration) produced by the continuous force, as determined by an appropriate error criterion. This approach is shown in Figure 1.

It is important to note that the method of Figure 1 requires that the criterion response to the continuous input be known, which generally would not be true in practice. To accomplish this objective, the approach proposed here assumes that: (1) a mathematical model or impedance measurements of the system under study are known and (2) the inputs of interest (e.g., explosive or nuclear blast) are given. Under these conditions the "criterion response" can be calculated and used to obtain the pulse train for the simulated test.

In general, the response-time history of a test article under simulated test should show a reasonable approximation to the expected environmental phenomena for meaningful hardness/vulnerability evaluation. To accomplish

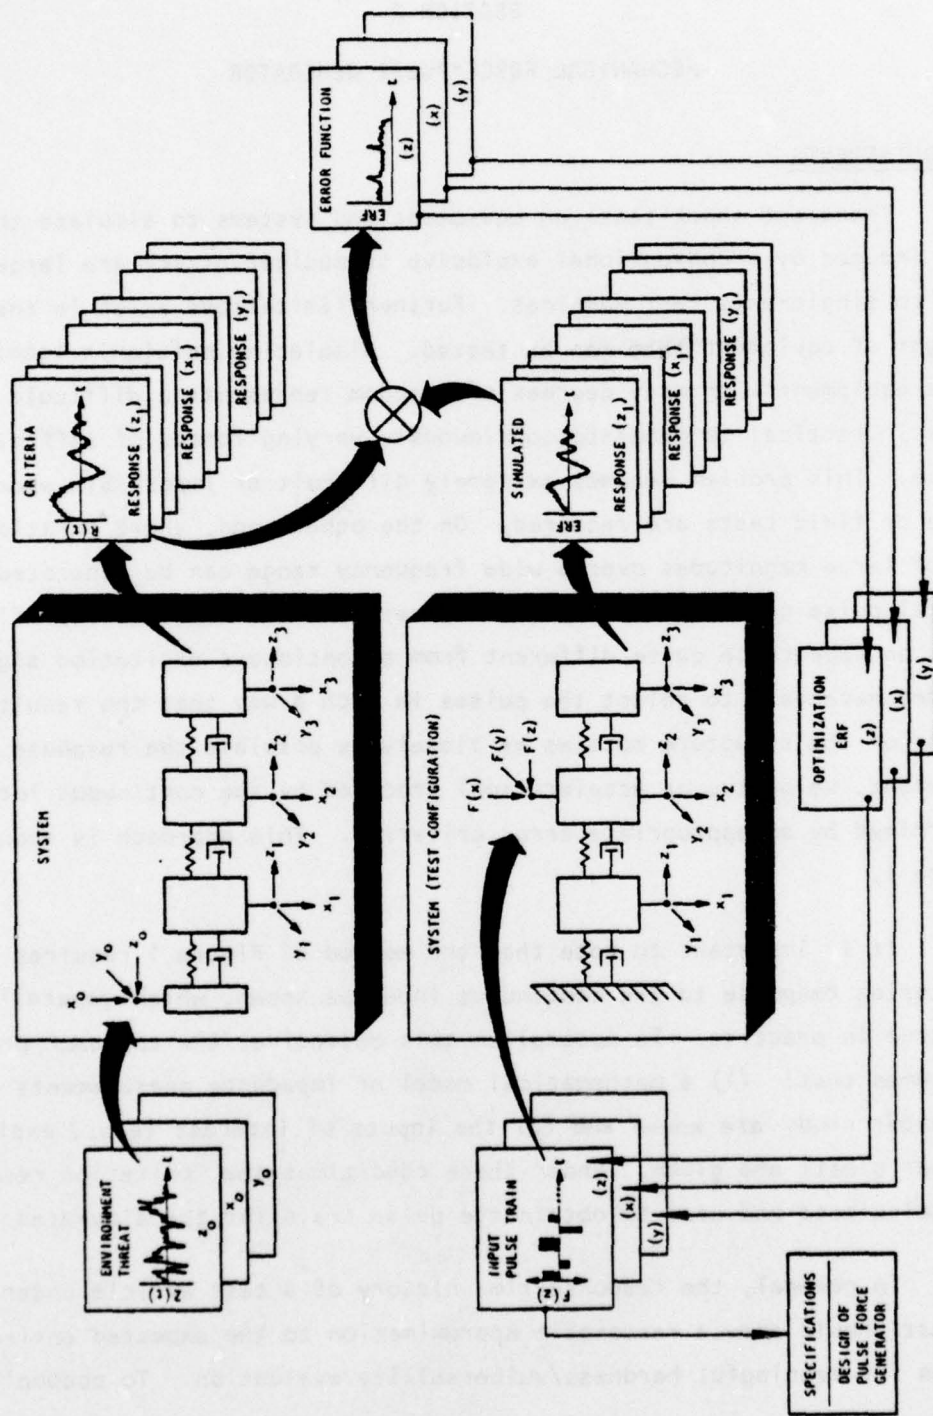


Fig. 1 — Optimum response simulation of multidegree systems by pulse excitation

the desired response motion, a computer algorithm is used for the optimum selection of a finite number of pulse heights, duration, and onset times to accomplish this objective.

The basic criterion used is the integral squared error between the reference and simulated response, evaluated at a sufficient number of points within the system under test to characterize it as completely as possible. Given the error criterion, the pulse occurrence times, pulse widths, and the pulse amplitudes are selected by a systematic search algorithm such that the error is minimized.

Application of the pulse generator for impedance measurements requires a different form of the pulse train. Use of the pulse generator in this manner requires a sufficiently long pulse train duration (T) to provide the required frequency resolution ($f = \frac{1}{T}$) and force levels sufficient to provide favorable signal-to-noise ratios over the frequency range of interest. Generally, configuration of the pulse train is optimized to generate an approximately flat Fourier magnitude spectrum. Studies have also shown that diagnostic pulse trains can be generated that approximate (in a transient sense) sine wave bursts, chirp, and random effects. Both chirp and random are particularly useful in developing functionals for nonlinear systems.

The pulse generator inherently possesses several desirable features for transient load application with large systems when tested in place and/or in the field. These features include:

- High force output
- Wide frequency band from static
- Portability
- Ganged operations
- Design simplicity
- Reliability

2.2 PRINCIPLE OF OPERATION

The concept of a mechanical pulse generator simply turns a device for energy absorption around to obtain the desired force profiles as a useful output (Ref. 3). By drawing a metal bar or mandrel through a cutting tool (or vice versa) with suitable motive power (air pressure, hydraulic pressure, explosive force, electric, mechanical), a series or a set of force-time histories may be generated. Reaction at the attach point of the device transmits a force output to a test article. Figure 2 illustrates the device with motive power for operation supplied by the stored energy in a pneumatic cylinder. Figure 3 is an example of a force-pulse time history as output from the device. The device may be started or stopped by a variety of devices.

Forces may be generated singly and in series as for one cutting head or in parallel with multiple cutting heads. A single large cutting tool may be used if economic. Cutting of metal may be groove cuts, i.e., the work is wider than the tool width; or single cut, i.e., the tool is wider than the work. The cutting tool may have a wide variety of shapes to suit the force waveform output requirement needed. Large forces may be generated from this device and the force required to cut metal is largely independent of rate (velocity). The force is a function of volume of chips cut (depth, width, and length of cut) and the specific energy of cutting. The energy absorbed in metal cutting is given by (Ref. 3)

$$F l = l w t \mu \quad (1)$$

where

- F = Force of cutting, lb
- l = Length of cut, in.
- w = Width of cut, in.
- t = Depth of cut, in.
- μ = Specific energy of cutting, in-lb/cu in.

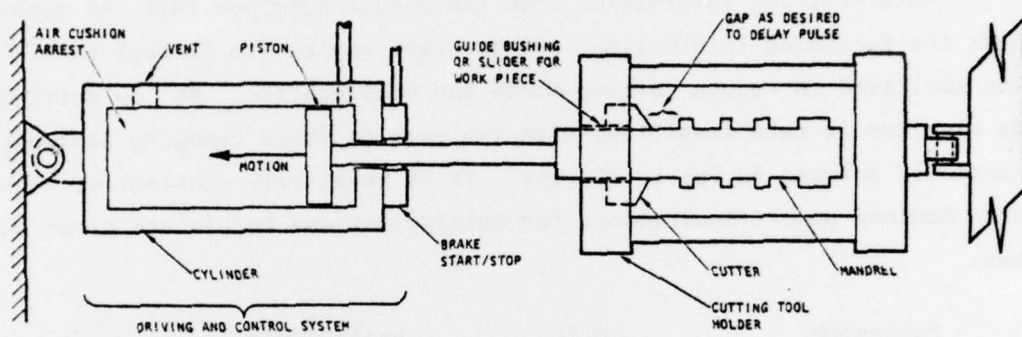


Fig. 2 — Pulse-forming device with driving and control system

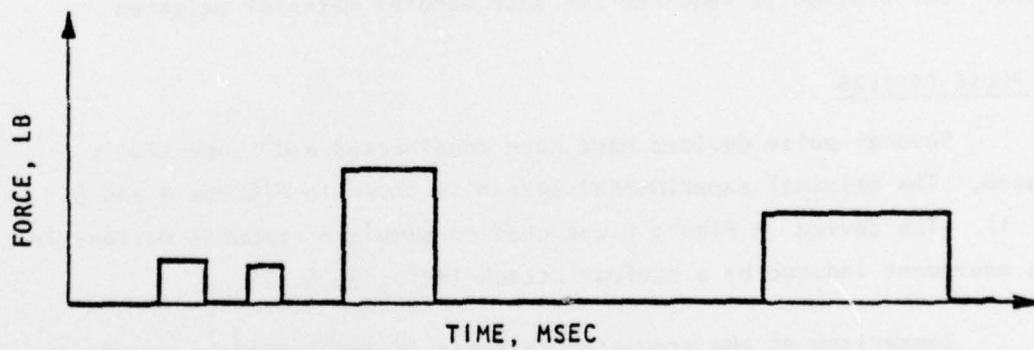


Fig. 3 — Force time-history output of device (typical)

The values of specific energy of cutting for mild steel and aluminum are 3×10^5 in.-lb/cu in. and 1.5×10^5 in.-lb/cu in., respectively. A load cell or strain gage may be incorporated in series with the device to provide force-time history readout as the device is operated.

Metal-cutting information from the *Metals Handbook* (Ref. 4) generally supports the foregoing information. Higher rake angles (to 20 deg) on the cutting tool tend to reduce cutting force and data scatter. At low cutting speeds aluminum is rate sensitive, with the cutting force changing somewhat exponentially between 40 ips to 100 ips. It is relatively constant at higher speeds. Nominal power requirements for cutting various metals are given as follows:

Magnesium	0.10	hp/in. ³ /min
Aluminum	0.15	hp/in. ³ /min
Copper alloys	0.25	hp/in. ³ /min
Steels	0.80	hp/in. ³ /min

These values may change considerably with hardness and alloy content. Calibration is required for each mandrel material selected.

2.3 PULSE DEVICES

Several pulse devices have been constructed and successfully operated. The original experimental system is shown in Figures 4 and 5 (Ref. 1). The device in Figure 6 was used to simulate response motions in large equipment induced by a nuclear attack (Refs. 5, 6, 7).

Comparison of the predicted response (determined from impedance measurements), pulse-simulated response, and measured response are provided in Figure 7. This same pulse generator, which was also used to measure transfer impedances (Ref. 8), has a nominal output force capacity to 10,000 lb. Another version in the form of drop shock tower is pictured in Figure 8 and output data is given in Figure 9. Figure 9 data are from a reinforced-concrete protective structure, flush buried to ground surface

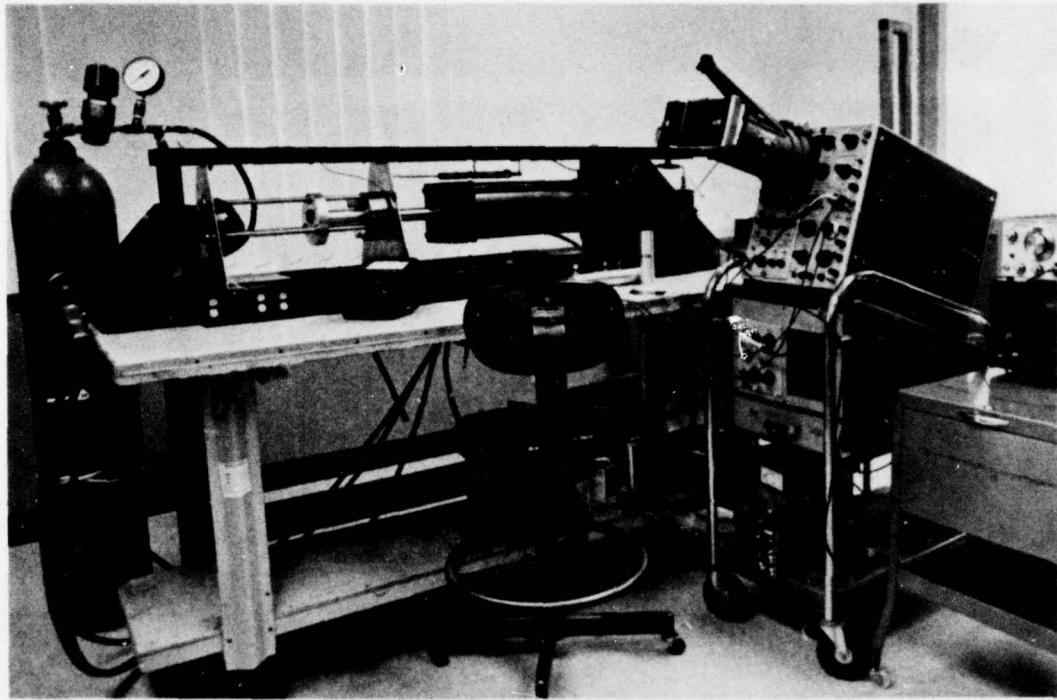


Fig. 4 — Experimental test for mechanical pulse generator

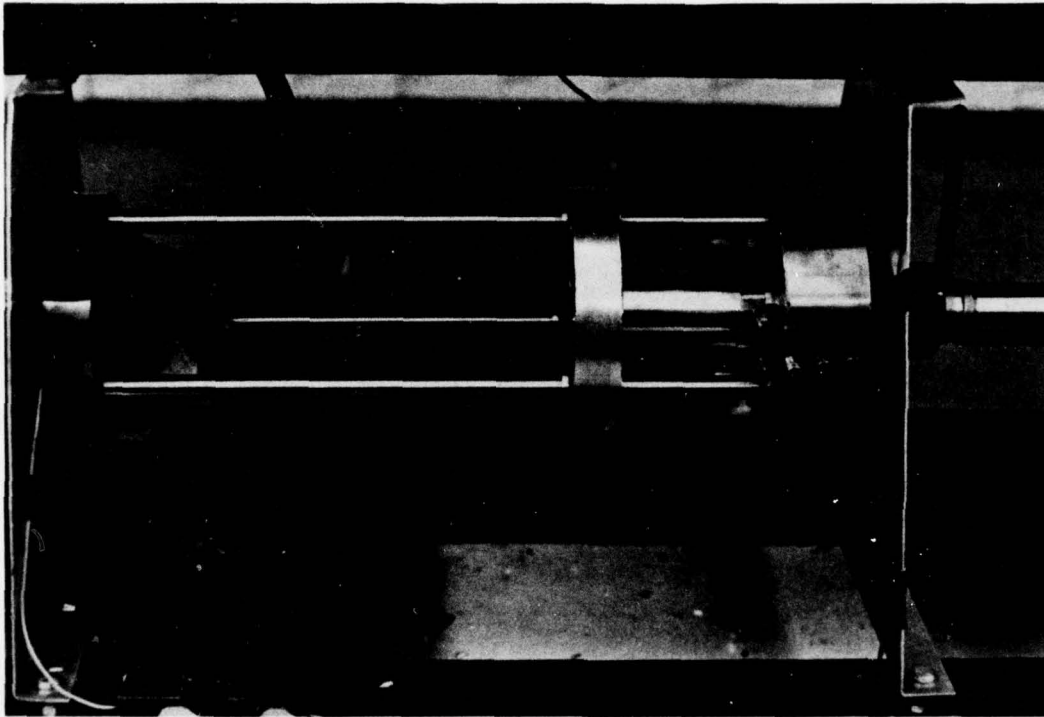


Fig. 5 — Cutting fixture with mandrel tool holder, right; bearing guide plate on mandrel, center; and output plate, left




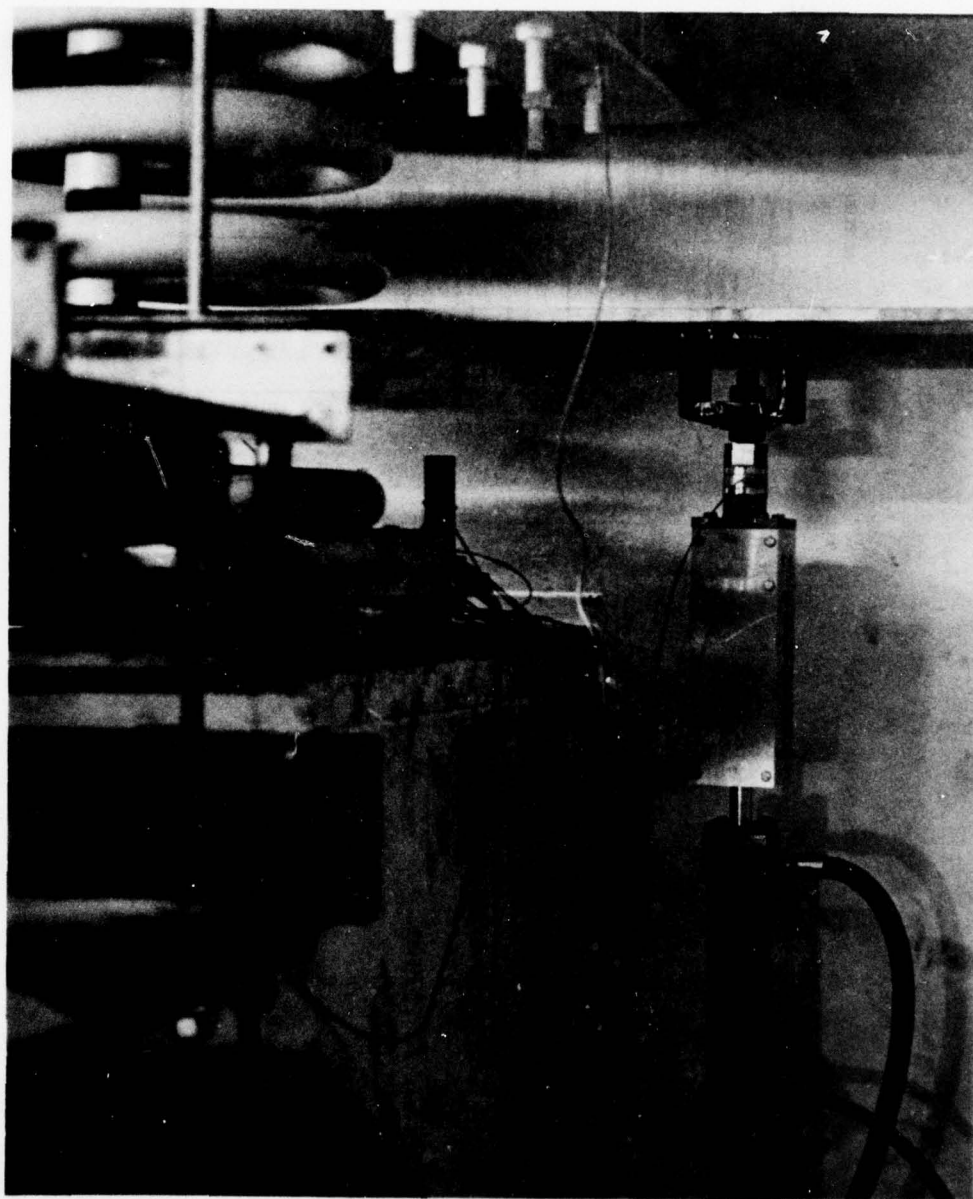


Fig. 6 — Pulse-test configuration for control room platform showing one of four units required

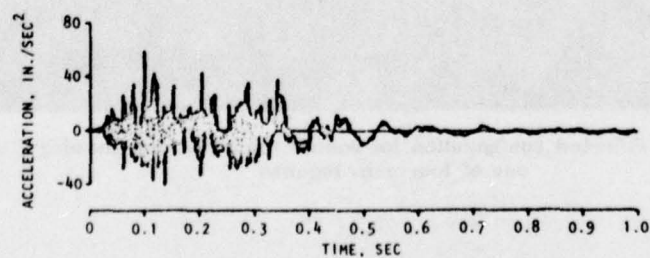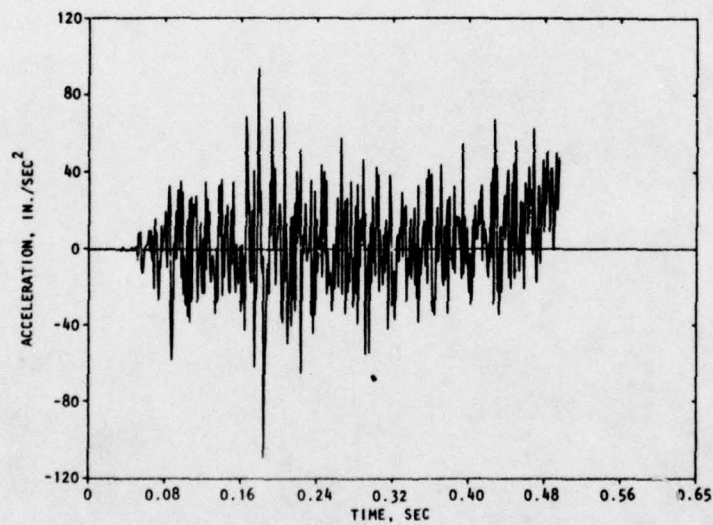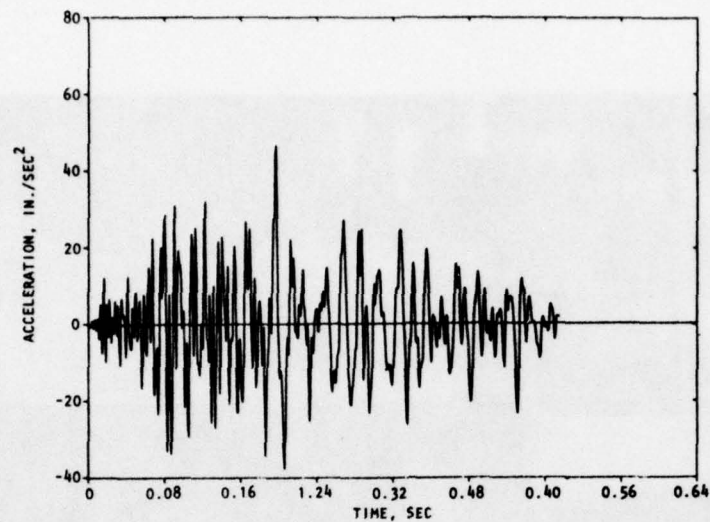

AA6346

Fig. 7 — Control room platform: acceleration-time histories of predicted, pulse-simulated, and pulse-tested motions

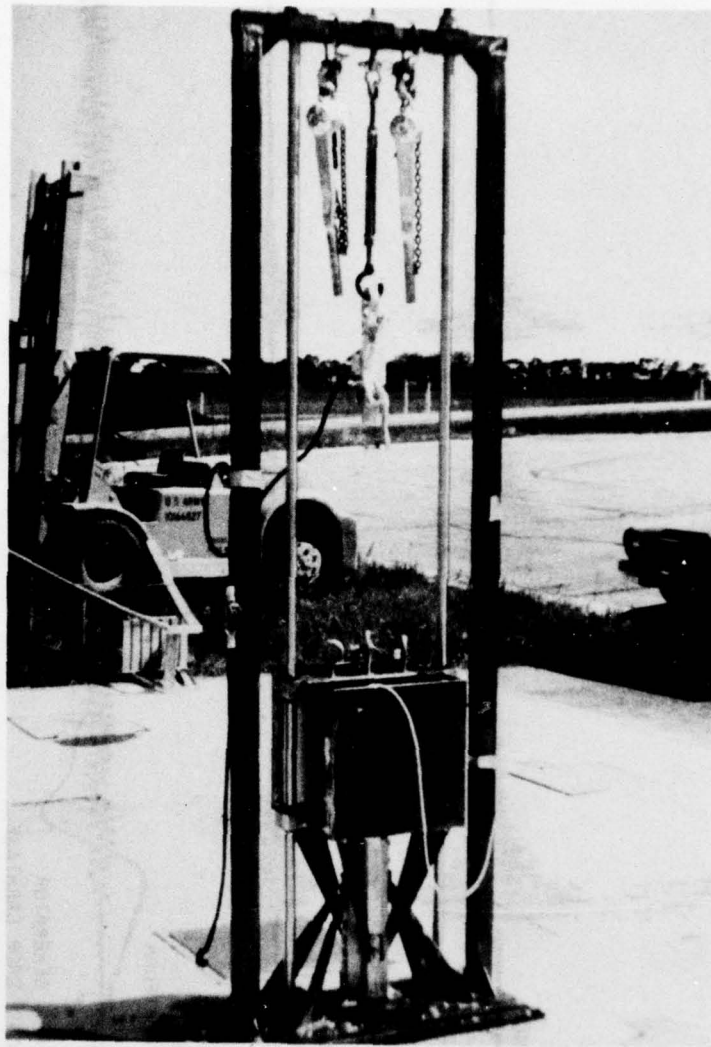


Fig. 8 — Medium-force pulse generator mounted on EDC structure

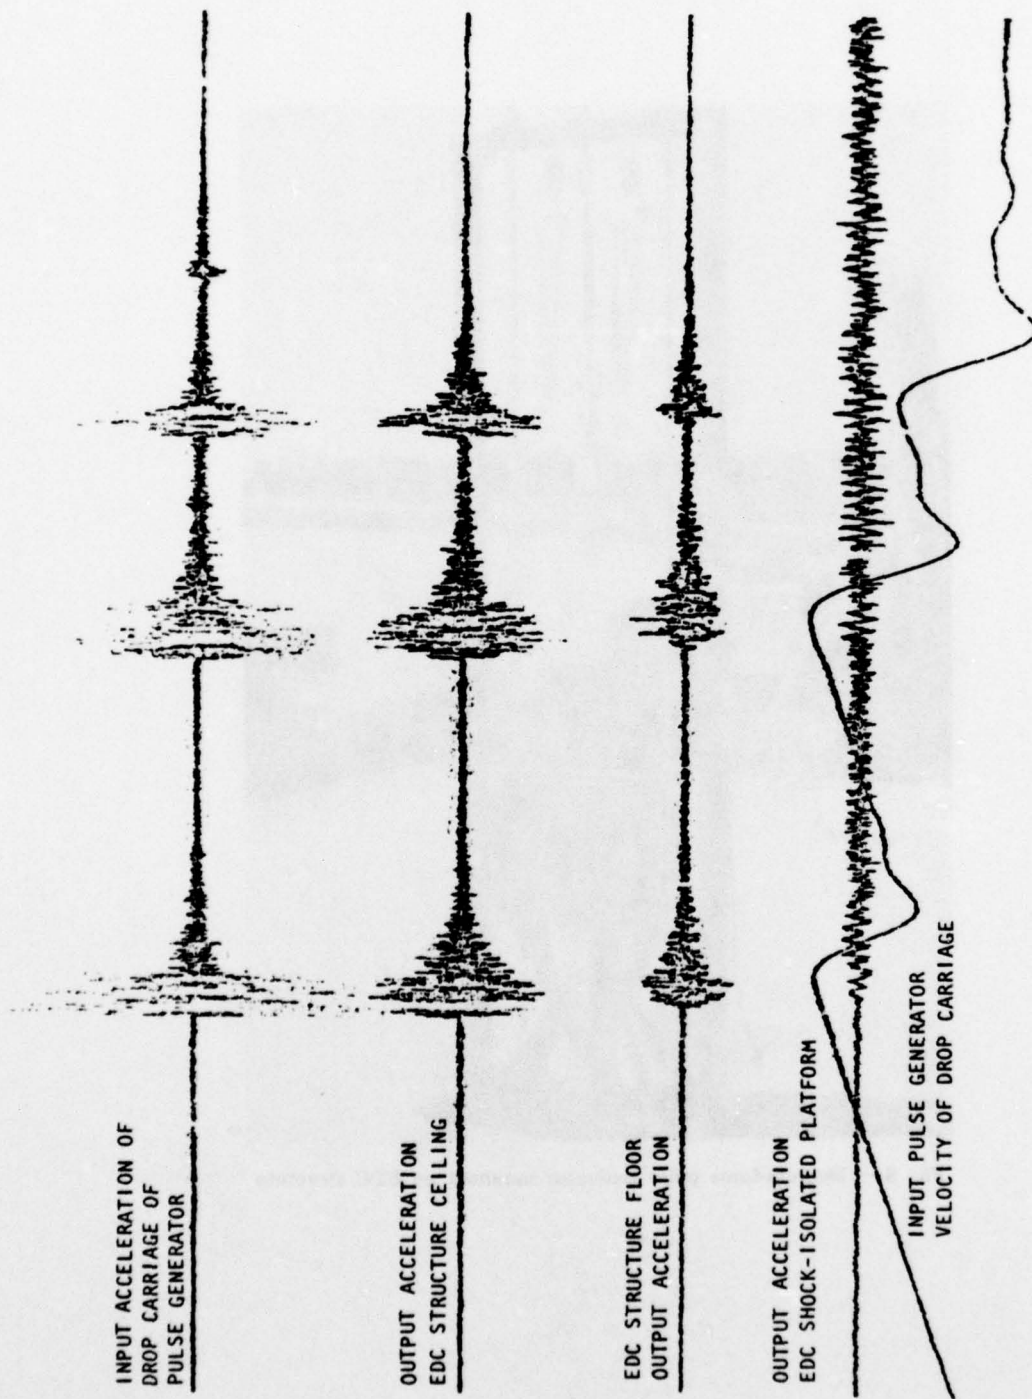


Fig. 9 — Oscilloscope records amplitude histories of drop carriage and EDC structure response

where the generator was configured for three 5000-lb pulses of 25 msec durations each. This drop shock tower has the potential capacity to produce pulse amplitudes up to 150,000 lb.

2.4 NRL PULSE GENERATING SYSTEM

The NRL Pulse Generating System, Figure 10, was primarily designed for laboratory use in conjunction with the medium-weight shock machine. However, this system is inherently flexible and may be used in remote locations and on shipboard. A full technical and engineering description of this system was provided to NRL in Report R-7710-3-4333, "Specification for Evaluation of Impedance Analysis Techniques for Naval Applications," December 1976 by Agbabian Associates, El Segundo, Calif. Major design change over previous versions was in reconfiguration so as to reduce the weight below gage (load cell). Maximum capacity of this unit is 10,000 lb force. To obtain maximum capacity, a dual cutter would be required, and bottled compressed air would be needed in place of plant air.

The calibration mandrel for the system is drawn in Figure 11, and its Fourier magnitude spectrum is given by Figure 12. A three-pulse mandrel Fourier spectrum is shown in Figure 13 only to present the wide spectrum that may be obtained.

The pulse-generator system is depicted in Figure 14. This system operates from plant air to an air/hydraulic multiplier, thence to a hydraulic drive to operate the pulser. Orifice flow control gives cutting velocities from 20 in./sec to 136 in./sec.

Initial applications for this device are planned for the U.S. Navy medium-weight shock machine, illustrated in Figure 15 with its impact hammer. Single-pulse impact of this hammer is in the order of 1 msec. Whereas, for example, the mandrel in Figure 11 generates 12 pulses of 0.8 msec each for a total test record length of 76 msec at 120 in./sec cutter velocity or 12 pulses of 4.8 msec each for a test record of 456 msec at a 20 in./sec cutter speed. This latter application is schematically shown in Figure 16.


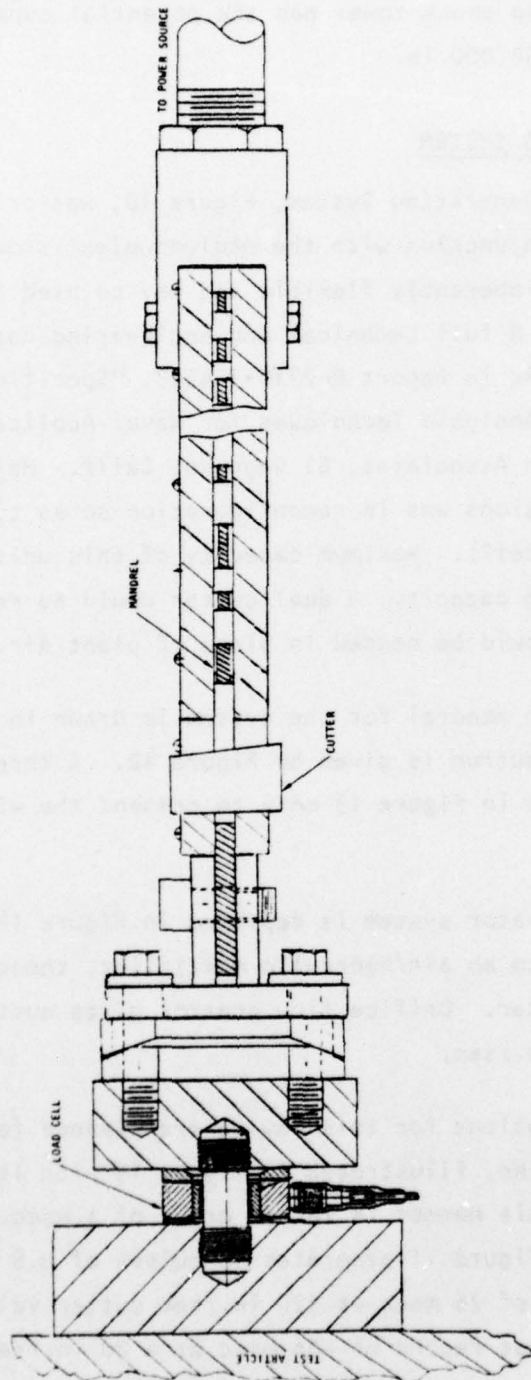


Fig. 10 — Outline drawing of NRL pulse generator

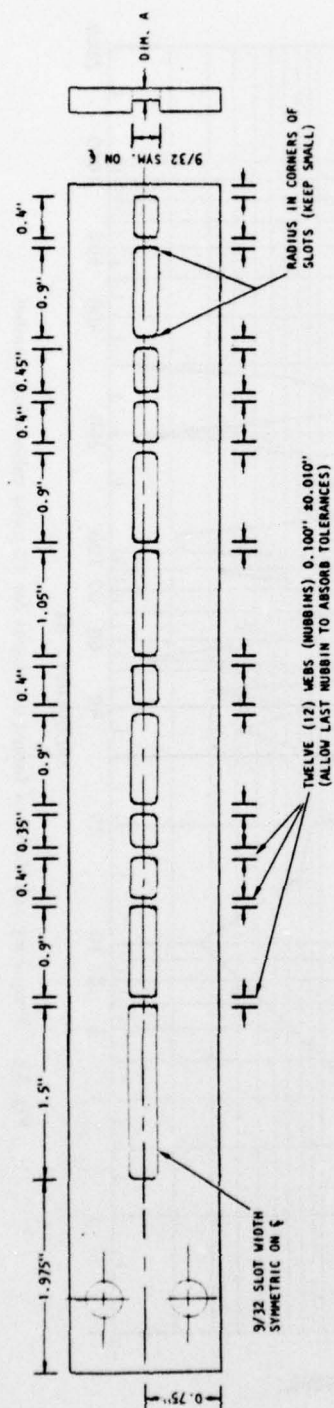

DET. NO.	DIM. A
7710-13A	0.25"
7710-13B	0.170"
7710-13C	0.085"

Fig. 11 — Calibration mandrel for NRL pulse generator


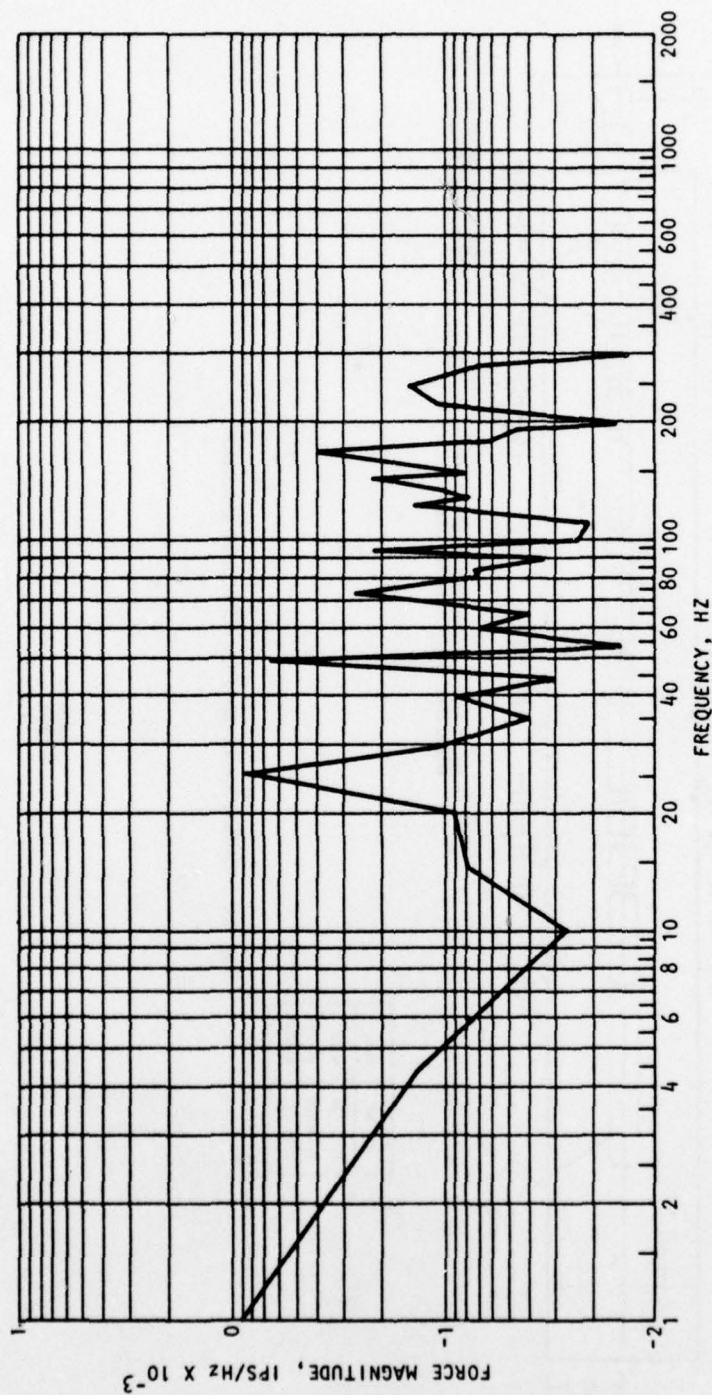


Fig. 12 -- Frequency transform of force-pulse input for 12-pulse calibration mandrel

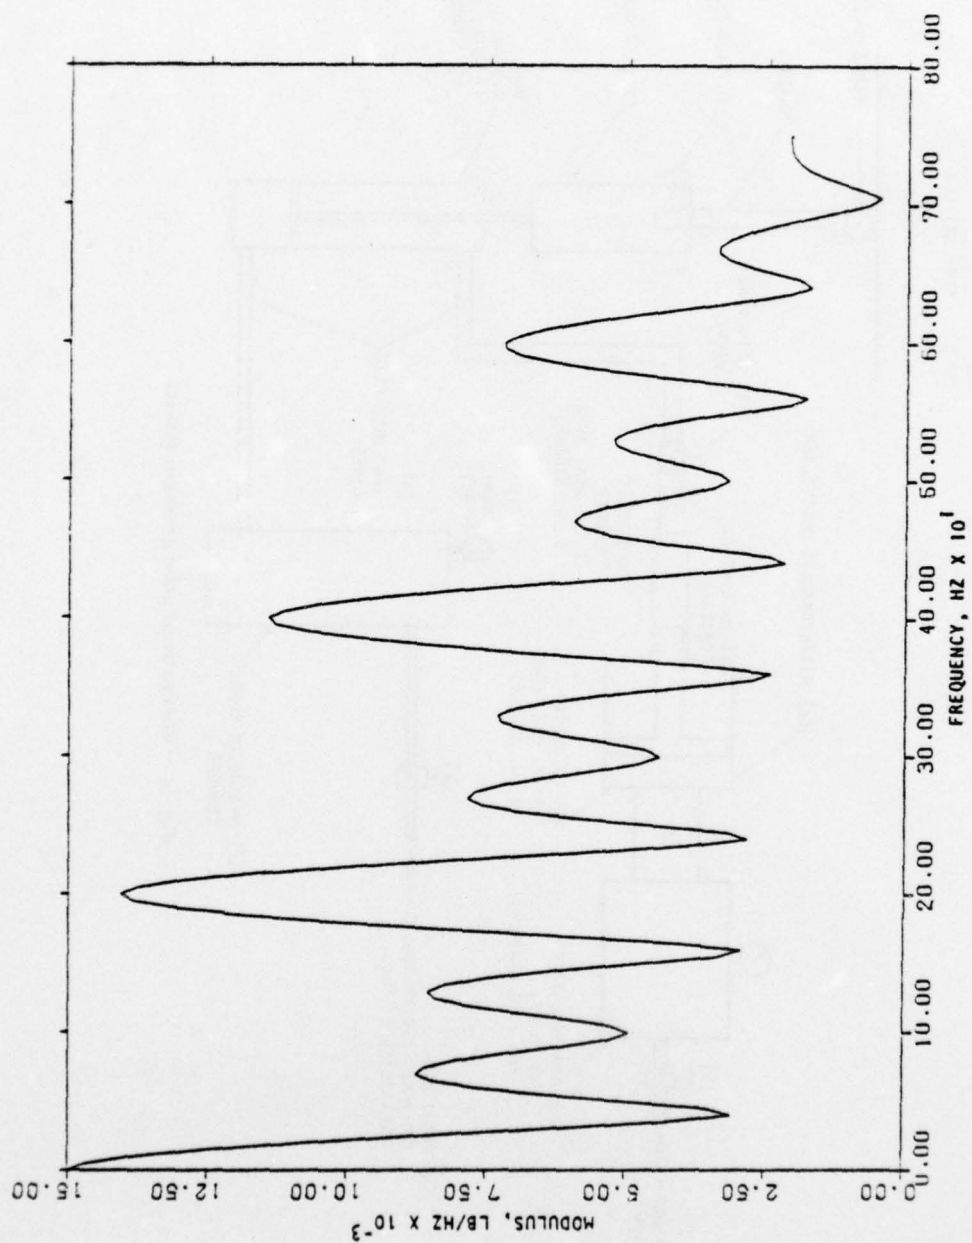

(a) Fourier magnitude

Fig. 13 - Frequency transform of force-pulse input for 3-pulse train

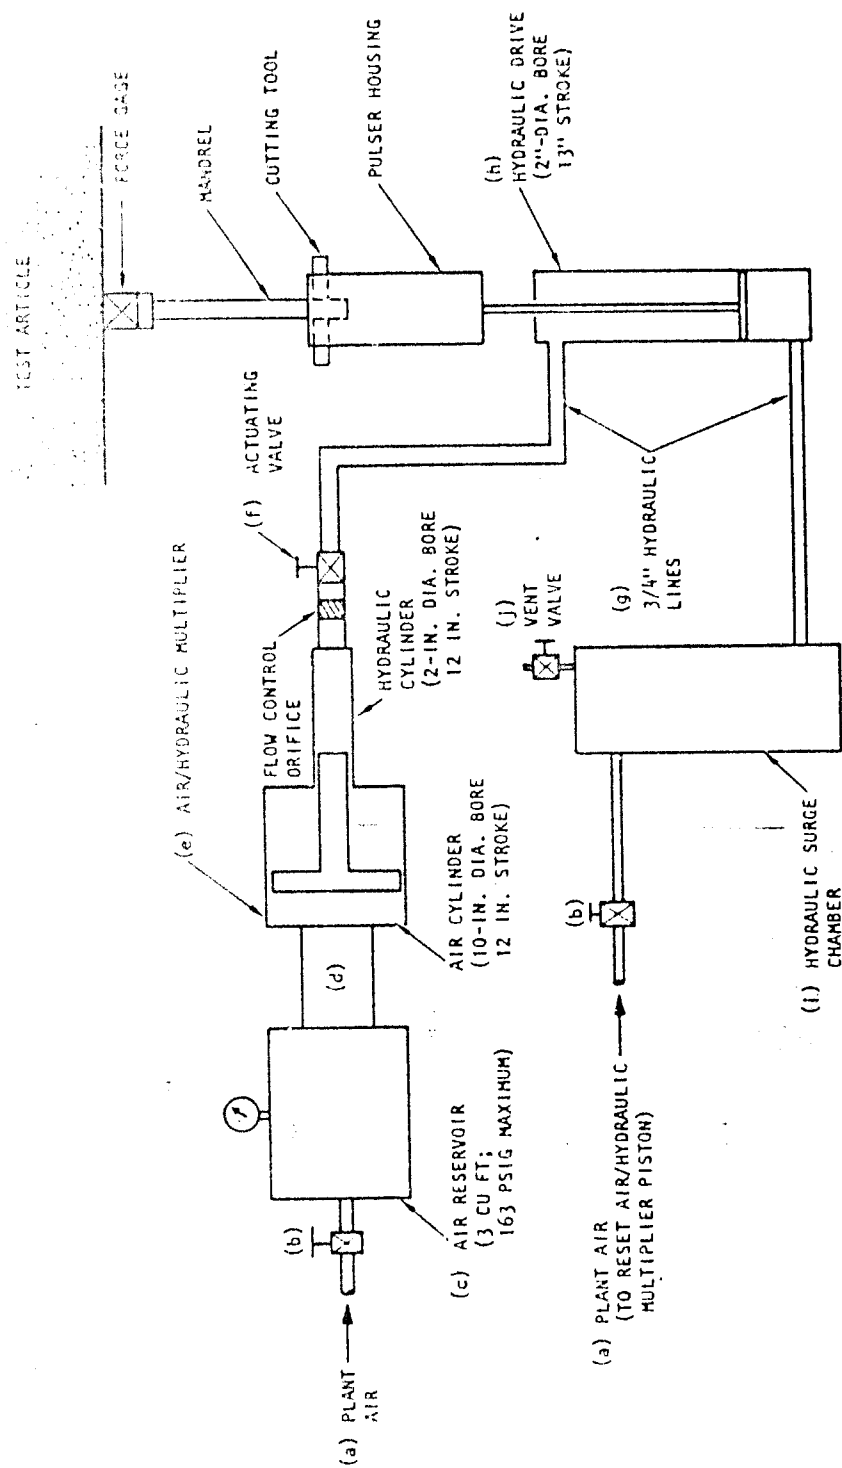


Fig. 14 — Schematic of pulse generator system

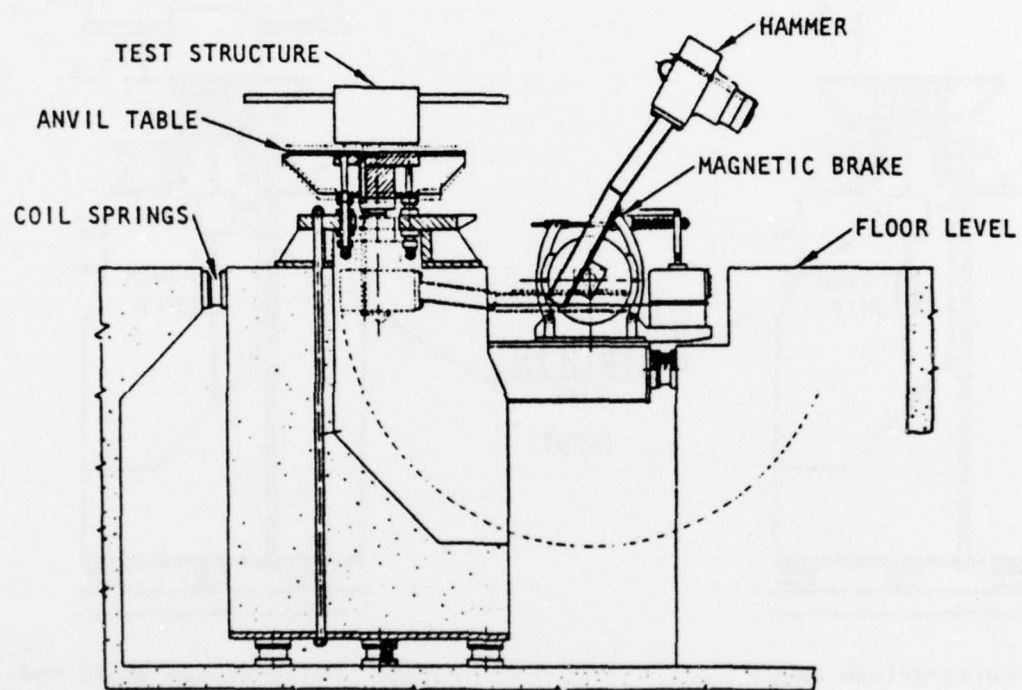


Fig. 15 — U.S. Navy high-impact shock machine for medium-weight equipment with mounted test structure

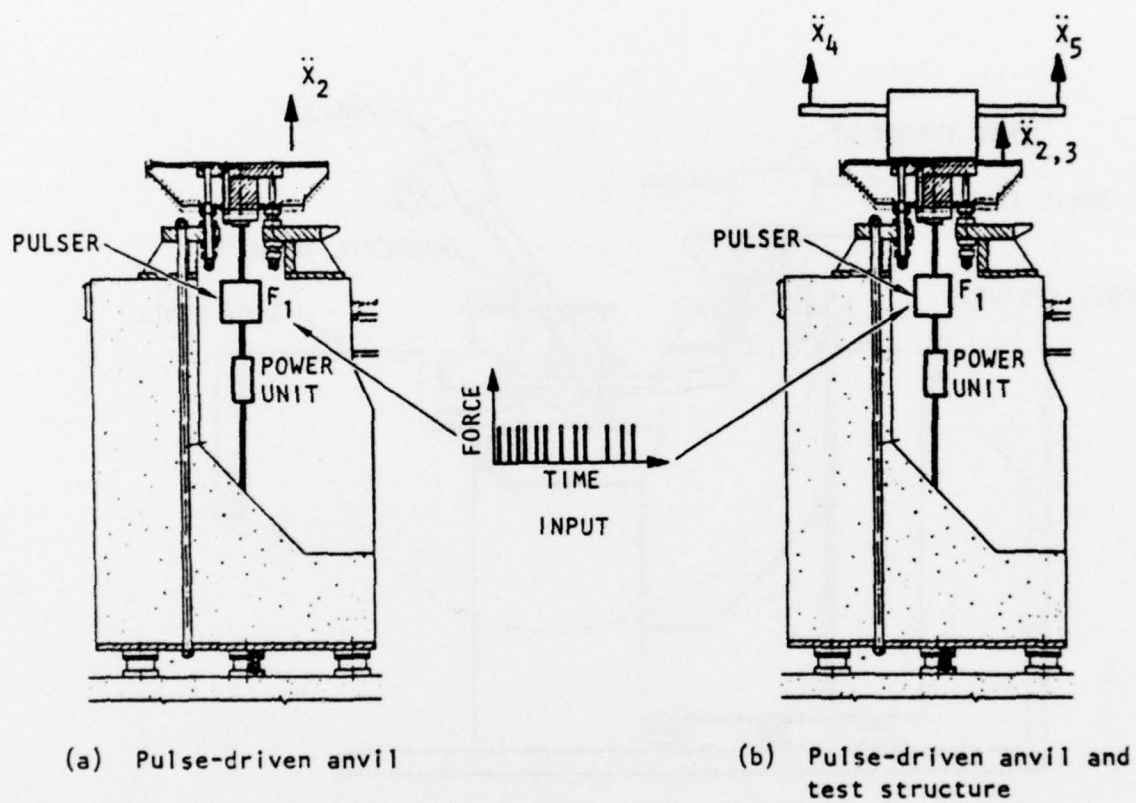


Fig. 16 — Shock machine anvil with and without test structure using pulse-drive system

SECTION 3

U.S. NAVY MEDIUM-WEIGHT SHOCK MACHINE PARAMETER IDENTIFICATION

3.1 SHOCK MACHINE AND TEST ARTICLE

The vibration of a mounting base or element of structure is altered when another structure is mounted thereto or a previously mounted structure is replaced with a different component. Knowledge of the shock and vibration environments at mounting locations within a naval vessel is a necessity for the determination of hardness and survivability of equipment. This is a continuing problem due to the continued changes in the state-of-the-art resulting in the upgrade and substitution of equipment.

The environment at mounting points of equipment is given by the following expression (Ref. 9):

$$V'(\omega) = V(\omega) \left[\frac{Z_{22}}{Z_{22} + Z_{33}} \right] \quad (2)$$

where

- $V(\omega)$ = Complex velocity of mounting point without equipment
- $V'(\omega)$ = Complex velocity of mounting point with equipment attached
- Z_{22} = Driving point impedance of mounting point
- Z_{33} = Driving point impedance of equipment

When one equipment is to be exchanged for another equipment and the original velocity at the equipment mounting interface is known, the response with the substituted equipment may be predicted by (Ref. 9):

$$V'(\omega) = V(\omega) \left[\frac{Z_{22} + Z_{33}}{Z_{22} + Z'_{33}} \right] \quad (3)$$


where the parameters of Equation 3 are the same as in Equation 2, except Z'_{33} is the driving point impedance of the substituted equipment.

Other forms of Equations 2 and 3 may be used and these basically include the transfer impedance term from the input load points to the equipment mounting locations.


A practical application of the above was conducted in 1960 (Ref. 10) using the medium-weight shock machine. Impedance measurements were made on the anvil and upon a test structure as sketched in Figure 17. The output impedance of the anvil for both magnitude and phase is in Figure 18 and the input impedance for the test article is given in Figure 19. The anvil and test article were struck with the hammer as shown in the configuration of Figure 15. The velocity response from this test is plotted in Figure 20 in the form of a velocity shock spectrum. A similar test was conducted upon the anvil only and the resulting data was modified by Equation 2 to predict the motion of the anvil if the test article was attached thereto. This prediction is also plotted in Figure 20. While the shapes of the two curves are in general conformity, the predicted amplitudes exceed actual up to a factor of nearly 2. Several areas have been considered to account for the above difference and the most probable one is the extremely low level of force used to measure the impedance of the components. As discussed in Section 1 of this report, a sufficient measurement force is required in a quasi-linear sense to obtain suitable values of damping (material, joints, aerodynamic).

An alternative means of measurement of a system is with and without load. Complex subtraction of these measurements using Equation 2 yields the input impedance of the load. An example of this procedure is given in Figure 21. This example is particularly interesting due to the extremely large impedance mismatch between the base structure and the spring isolator-supported load that was detected by the impedance measurements.


The foregoing tests on the shock machine are planned to be repeated using updated techniques of measurement and data processing. Recent experience indicates that very useful results will be obtained by which accurate



(a) Test structure

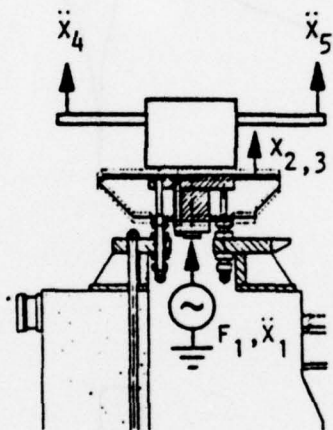

(c) Combined anvil and test structure



(b) Anvil

Fig. 17 — Impedance measurements of shock machine and test structure

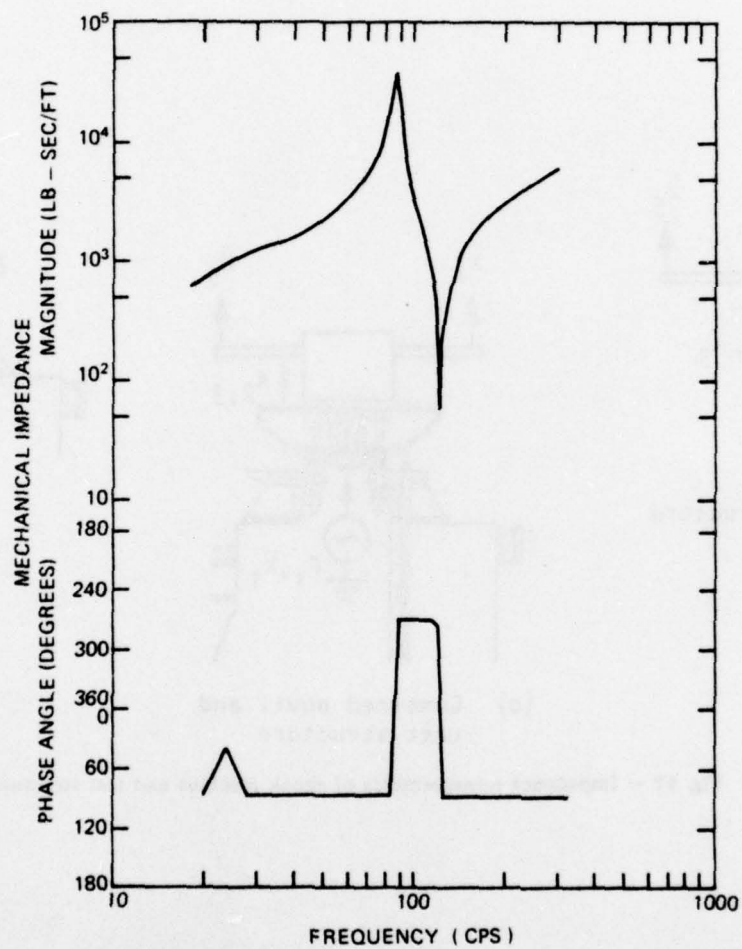


Fig. 18 — Output impedance anvil (Z_{22}) of medium-weight shock machine

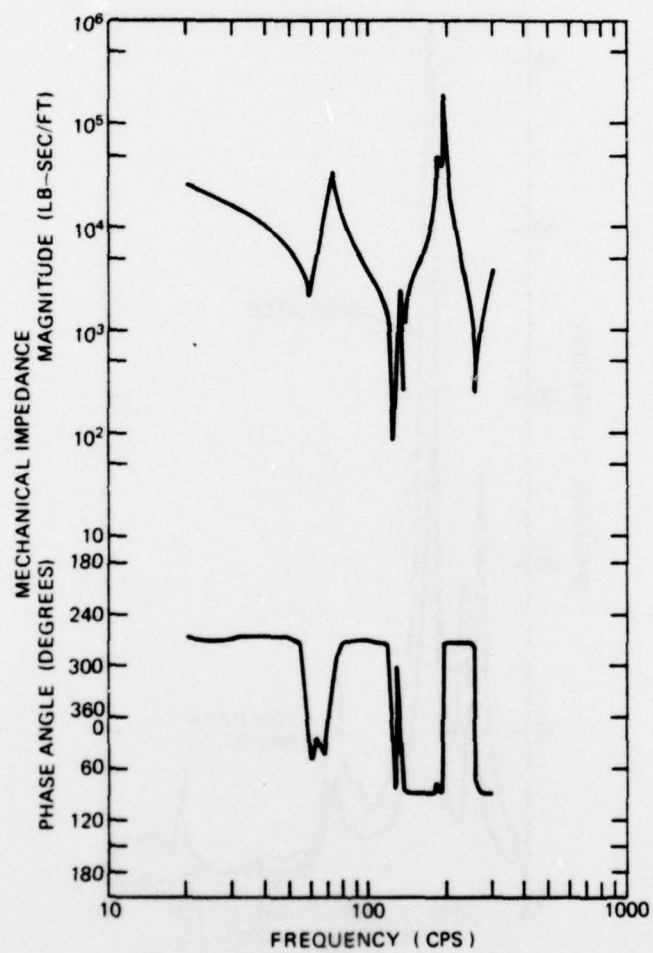


Fig. 19 - Input impedance test article (Z_{33})

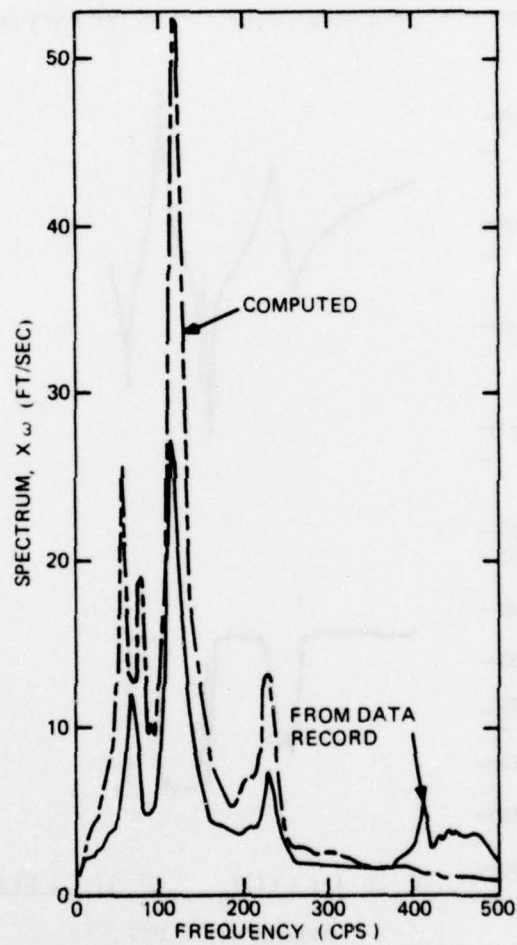


Fig. 20 — Shock spectra velocity of anvil and test article
(data record and computed)

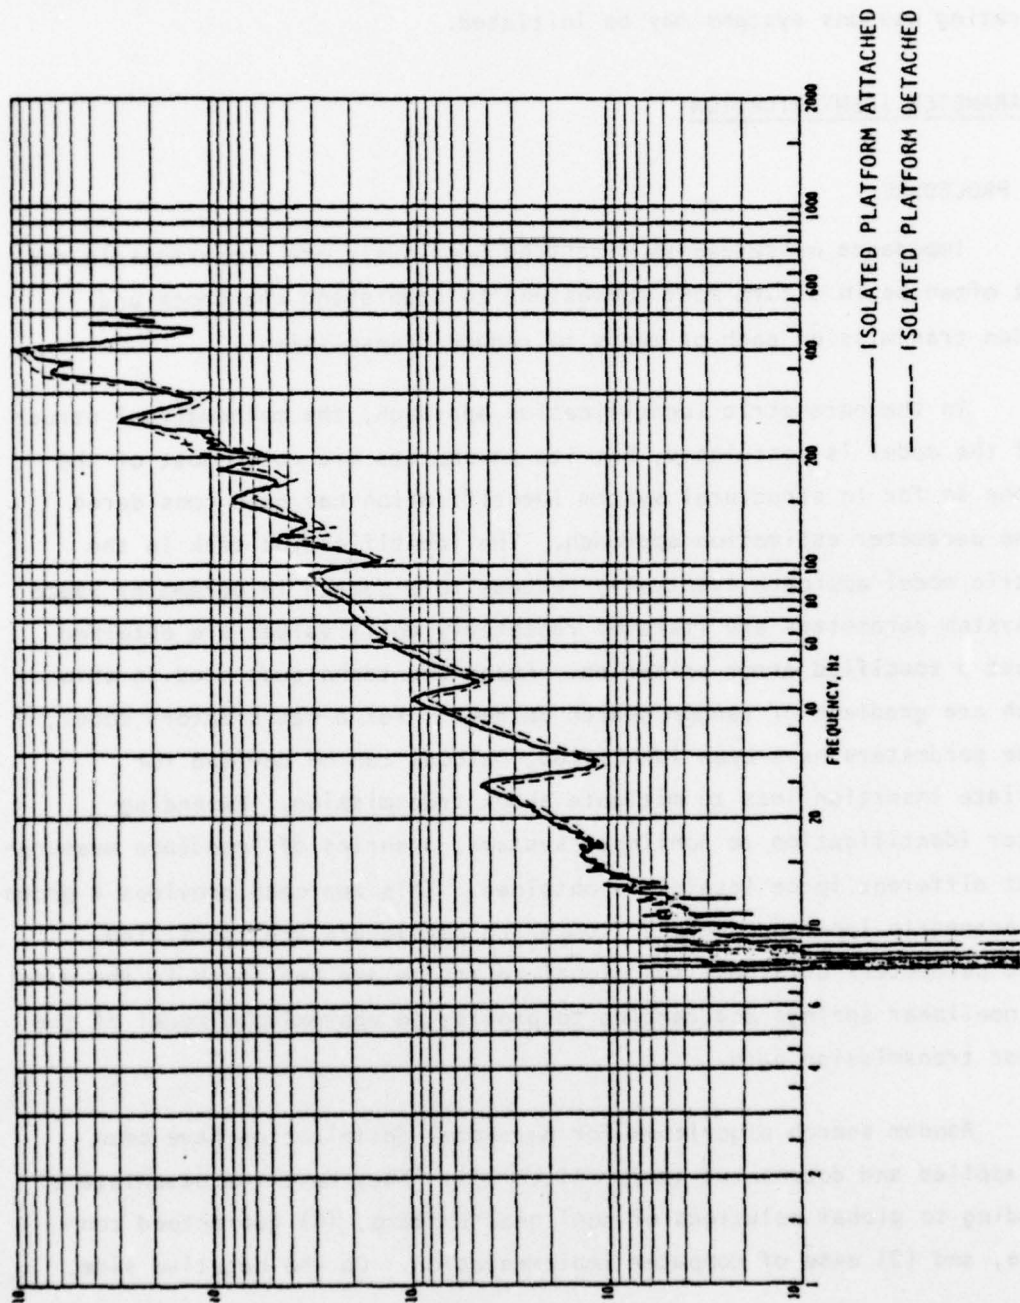


Fig. 21 - Driving point impedance tests of a reinforced-concrete structure at attachment location of a shock isolator

predictions can be made on the velocity effects of loading a structure with new and changed equipment. Once this procedure is established, application to operating weapons systems may be initiated.

3.2 PARAMETER IDENTIFICATION

3.2.1 PROCEDURE

Impedance measurements discussed previously are nonparametric and may not often be in a form most convenient to understand the shock and vibration transmission path or means to reduce transmissions.

In the parametric identification approach, the mathematical structure of the model is postulated, but its parameters are not. Most of the work done so far in structural system identification has been considered from the parameter estimation approach. The identification task in the parametric model approach eventually reduces to a search in parameter space where system parameters are iterated repeatedly until values are obtained that meet a specified error criterion. Among the techniques used in this approach are gradient or random search methods. For a satisfactory model, once the parameters have been identified, methods can be devised for appropriate insertion loss to mitigate shock transmission. Extending parameter identification to nonlinear systems, a series of impedance measurements at different force levels are obtained. This approach provides a group of nonparametric impedance curves from which parameters are identified. From the parameters obtained, functional relations are set forth in the model as for nonlinear springs and damping to provide an approximate model of the nonlinear transmission path.

Random search algorithms for parameter optimization have been widely applied and documented (Refs. 11 to 17). They have the advantage of (1) leading to global solutions of nonlinear systems, (b) guaranteed convergence, and (3) ease of computer implementation. On the negative side,

random search algorithms may converge very slowly, particularly in criterion surfaces of high dimensionality. The basic algorithm for minimization of a criterion function $J(\alpha)$, where $\alpha = (\alpha_1, \alpha_2, \dots, \alpha_m)^T$ is a vector of unknown parameters, proceeds as follows: (1) An initial parameter value α^0 is estimated and $J(\alpha^0)$ is evaluated; (2) trial points $\alpha^i \in \Omega_\alpha$, where Ω_α is the given permissible region in the m -dimensional parameter space, are selected from an appropriate probability density function defined over Ω_α ; (3) a successful point α^{i+1} is one for which $J(\alpha^{i+1}) < J(\alpha^i)$. The sequence $J(\alpha^i)$ thus converges to a local minimum. Rather than using "pure random search," most algorithms are based on a "random creep" procedure in which exploratory steps are confined to a hypersphere centered about the latest successful point α^i . However, convergence by such procedures may be extremely slow, since no allowance is made for variations in the nature of the criterion function surface as the search progresses towards a minimum.

Several procedures have been tried in the past to circumvent slow convergence. The addition of a bias vector to each iteration causes the search to favor successful directions (Ref. 14). Restriction of the search to a directed hypercone has also been proposed (Ref. 16). However, such schemes are highly directional and lose some of the flexibility of the random search procedure, as in the case of narrow "canyons" or "ridges" in the criterion function surface. Rastrigin (Ref. 11) has compared a random search where each step is random in direction but fixed in length (fixed-step-size random search), with a fixed-step-size gradient search, and showed that under certain conditions the random search is superior. It is intuitively evident, however, that one would obtain even better performance if the step size of the random search procedure were optimized at each step of the iteration. If the steps are too small, the average improvement per step will also be small and convergence time will be lengthened. If the steps are too large, they may overshoot the minimum; and the probability of improvement will again be too small. Hence, some method of adapting the step size to the local behavior of $J(\alpha^i)$ is indicated.

Schumer and Steiglitz (Ref. 15) have tested one approach to adaptive step size random search. They use a fixed-step-size algorithm, where the trial vector $\Delta \alpha^i$ is of length ℓ and distributed uniformly over the hypersphere of radius ℓ whose center is at the latest successful parameter value α^i . A random step of size ℓ and an incremental step of size $\ell(1 + a)$, where $0 < a < 1$ are taken in the same direction. The step size that produces the larger improvement is used as the nominal length ℓ for the next iteration. If no improvement occurs, ℓ is incrementally reduced. Thus, the algorithm is capable of adapting its step size as a function of the search.

The algorithm used for the medium-weight shock machine is another approach to the determination of the optimal step size (Ref. 18). Rather than a fixed-length step, steps used are random in both length and direction. Hence, the adaptation described below is based on the selection of the optimal variance of the step-size distribution as the search progresses. Large variances are desirable in the early, exploratory portions of a search. However, in the vicinity of a local optimum, a smaller value of the standard deviation, σ , will decrease the probability of overshoot.

The algorithm for the adaptive random search consists of alternating sequences of a global random search with a fixed value for the step size variance followed by searches for the locally optimal σ .

Figure 22 illustrates the adaptive algorithm whereby a very wide-range search selects the standard deviation best step size (σ) for the coarseness of the increments used, followed by a sequential precision search of finer increments. As the rate of convergence decreases, a new precision search is made, but directed towards a smaller step size. At selected iteration intervals, the wide-range search is reintroduced to prevent convergence to local minima.

The adaptive random search method was used to determine a pulse train (composed of 8 pulses) whose response spectrum matches a criterion

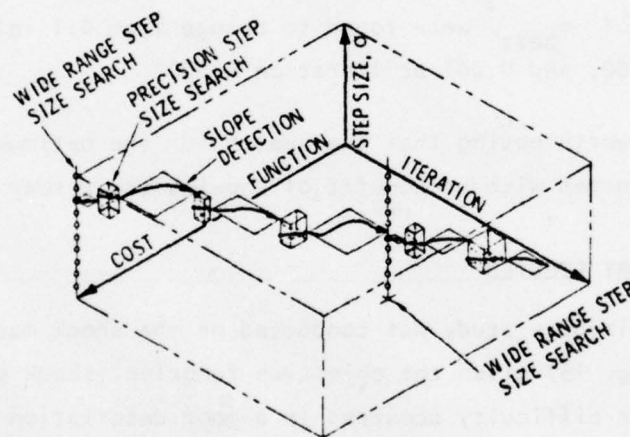


Fig. 22 — Adaptive step size search, both wide range and precision, for rapid convergence of cost function

response spectrum as closely as possible over a given frequency range ω_{\min} to ω_{\max} . Since each individual pulse in the train is characterized by 3 independent parameters (amplitude, a_i ; duration, d_i ; initiation time, t_i), a total of 24 parameters are needed to define the 8 pulses of the desired train. Note that the response spectrum of a pulse train is a nonlinear function of the pulse parameters.

Figure 23 shows that superior results are obtained by using the adaptive features of the random search method. While both cases (a) and (b) started with the same standard deviation, $\sigma_{\text{best}} = 0.1$, in the case (a) the search was conducted for 2000 steps with fixed σ . When the search for the best standard deviation, σ is conducted at a rate of iteration frequency = 500, the values of σ_{best} were found to change from 0.1 initially to 0.01 at iteration = 500, and 0.001 at iteration = 1000.

It is worth noting that the search for the optimum solution of this problem was performed without benefit of knowing the answer in advance.

3.2.2 PRELIMINARY STUDIES

A preliminary study was conducted on the shock machine anvil and test article (Fig. 15) given the objective function (shock spectrum) of Figure 20. Major difficulty occurred in a poor description of the pulse input from the hammer. A 1 msec rectangular pulse was finally specified and held fixed during all subsequent computations. Shock spectrum objective functions also pose costly computer operations as each parameter iteration involves conversion of trial model time-histories into shock spectra until convergence is obtained.

The results of the preliminary parametric study showed (for the four-degree-of-freedom model chosen to represent the distributed system) reasonable results. Parameters for the model are listed in Table 1 and the shock response spectrum is given in Figure 24. Results of the spectrum may be compared to Figure 20.

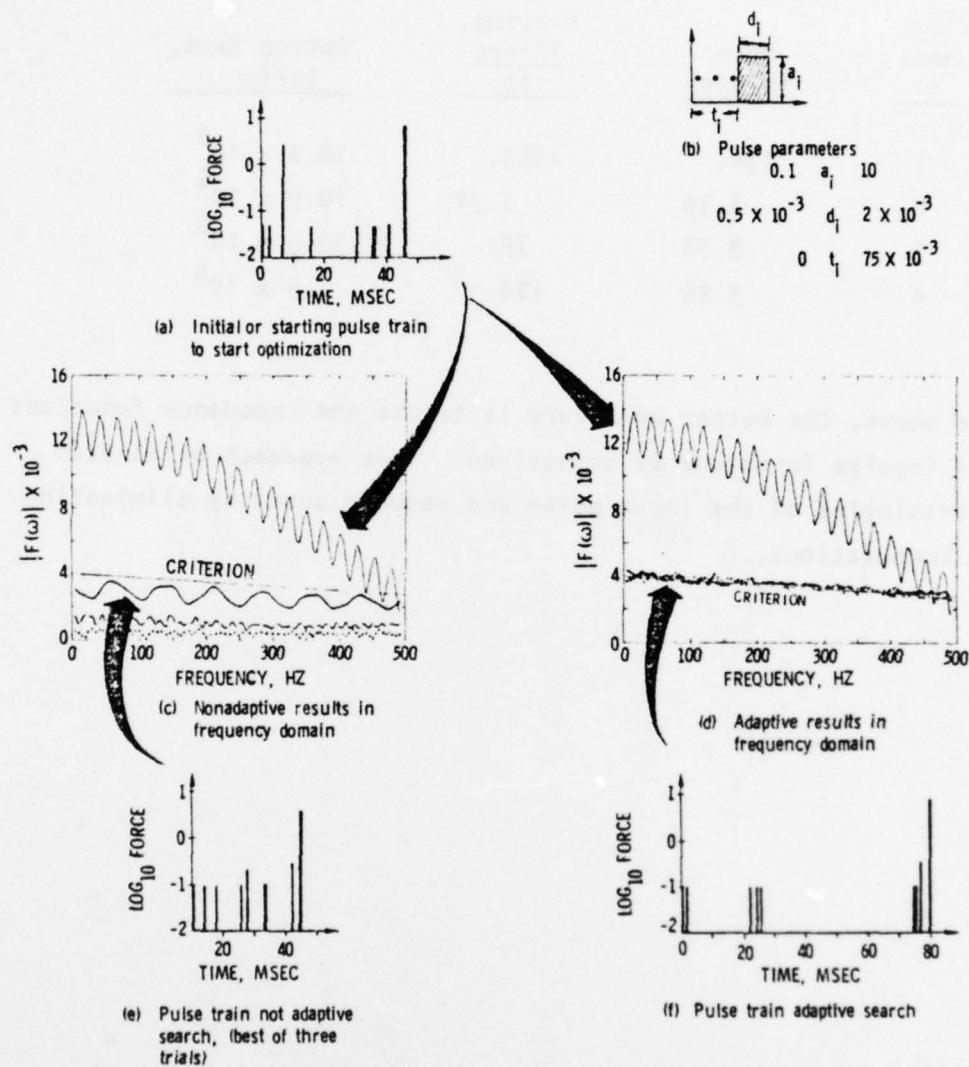


Fig. 23 — An 8-pulse train (parameters of amplitude, duration, and occurrence time) is given initial values and then optimized by adaptive and nonadaptive random search methods to match a criterion frequency spectrum

TABLE 1. MODEL PARAMETERS OF ANVIL AND TEST ARTICLE
(Input impulse of 1 msec duration)

<u>Mass No.</u>	<u>Mass (slugs)</u>	<u>Damping, lb-sec ft</u>	<u>Spring Rate, lb/ft</u>
1	136.	1550.	18.2×10^6
2	3.39	3.31	10.9×10^6
3	8.78	79.	35.9×10^6
4	3.96	128.	6.9×10^6

In view of the above, the better procedure is to use the impedance functions in the form of impulse functions as objectives. This approach eliminates the large uncertainties of the input pulse and reduces costs by eliminating shock spectra computations.

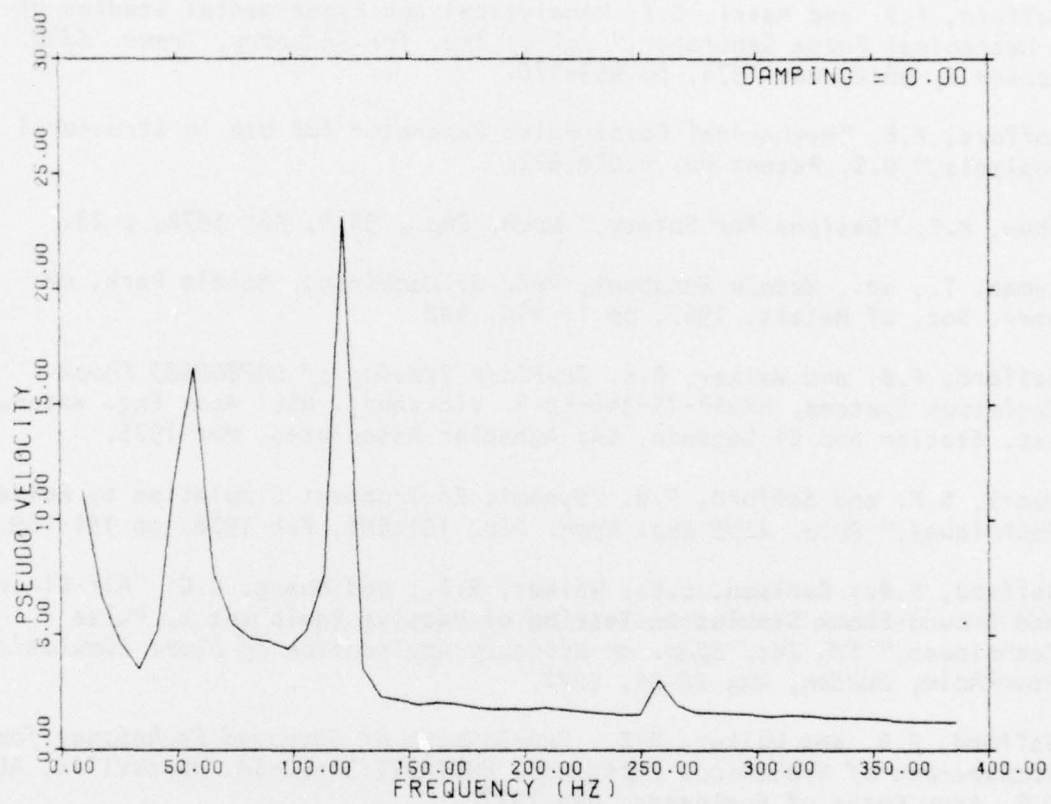


Fig. 24 — Shock spectrum response of anvil and test article using identified parameters

SECTION 4

REFERENCES

1. Safford, F.B. and Masri, S.F. "Analytical and Experimental Studies of a Mechanical Pulse Generator," *Jnl of Eng. for Industry, Trans. ASME, Series B*, 96:2, May 1974, pp 459-470.
2. Safford, F.B. "Mechanical Force Pulse Generator for Use in Structural Analysis," U.S. Patent No. 4,020,672.
3. Shaw, M.C. "Designs for Safety," *Mech. Eng.*, 94:4, Apr 1972, p 23.
4. Lyman, T., ed., *Metals Handbook, Vol. 3: Machining*. Metals Park, OH: Amer. Soc. of Metals, 1967, pp 1, 440, 442.
5. Safford, F.B. and Walker, R.E. *In-Place Testing of SAFEGUARD Shock-Isolation Systems*, HNDSP-75-346-ED-R. Vicksburg, MSL: Army Eng. Waterways Exp. Station and El Segundo, CA: Agbabian Associates, Mar 1975.
6. Masri, S.F. and Safford, F.B. "Dynamic Environment Simulation by Pulse Techniques," *Proc. ASCE Eng. Mech. Div.* 101:EM1, Feb 1976, pp 151-169.
7. Safford, F.B.; Carlson, L.E.; Walker, R.E.; and Huang, C.C. "Air-Blast and Ground-Shock Simulation Testing of Massive Equipment by Pulse Techniques," *5th Int. Symp. on Military Application of Blast Simulation*, Stockholm, Sweden, May 23-26, 1977.
8. Safford, F.B. and Walker, R.E., *Development of Improved Techniques for Measurement of Mechanical Impedance*, HNDTR-77-31-ED-SR, Huntsville, AL: U.S. Army Corps of Engineers, May 1977.
9. Blake, R.E. and Belsheim, R.O. "Significance of Impedance in Shock and Vibration," in *Colloquium on Mechanical Impedance Methods* edited by R. Plunkett. New York: Amer. Soc. of Mech. Engineers, 1958.
10. Belsheim, R.O., "Application of Electronic Computer to Dynamic Response Problems," Paper presented at ASCE Meeting, Boston, MA, Oct 1960.
11. Rastrigin, L.A. "The Convergence of the Random Search Method in the Extremal Control of a Many Parameter System," *Automation & Remote Control*, 24: pp 1337-1342, 1963.
12. Karnopp, D.C. "Random Search Techniques for Optimization Problems," *Automatica*, 1: pp 111-121, 1963.

REFERENCES (CONTINUED)

13. Matyas, J. "Random Optimization," *Automation & Remote Control*, 26:2, 1965.
14. Bekey, G.A.; Gran, M.H.; Sabroff, A.E.; and Wong, A. "Parameter Optimization by Random Search Using Hybrid Computer Techniques," *AFIPS Conf. Proc.* 29: 1966.
15. Schumer, M.A. and Steiglitz, K. "Adaptive Step Size Random Search," *IEEE Trans. on Automatic Control*, AC-13:3, 1968.
16. Wozny, M.J. and Heydt, G.T. "Hyperconical Random Search," *Jnl of Dyn. Systems, Measurement, & Control*, 94:1, Mar 1972, pp 71-78.
17. Beltrami, E.J. and Indusi, J.P. "An Adaptive Random Search Algorithm for Constrained Minimization," *IEEE Trans. on Computers*, Sep 1972, pp 1004-1007.
18. Masri, S.F.; Bekey, G.A.; and Safford, F.B. "An Adaptive Random Search Method for Identification of Large-Scale Nonlinear Systems," *4th Symp. for Identification and System Parameter Estimation, Int. Federation of Automatic Control, Tbilisi, USSR, Sep 1976. (To be published in Automatica)*

DISTRIBUTION LIST

ASSISTANT TO THE SECRETARY DEFENSE
ATOMIC ENERGY
WASHINGTON , DC 20301
ATTN DONALD COTTER

DIRECTOR
DEFENSE ADVANCED RSCH PROJ AGENCY
ARCHITECT BUILDING
1400 WILSON BLVD
ARLINGTON VA. 22209
ATTN A TACHMINDJI
ATTN STO KENT KRESA
ATTN TECHNICAL LIBRARY
ATTN R CHAPMAN

DIRECTOR
DEFENSE INTELLIGENCE AGENCY
WASHINGTON D.C. 20301
ATTN DI-7D E. OFARRELL
ATTN DI-7E
ATTN DT-1C J. VERONA
ATTN DT-2 WPNS + SYS DIV
ATTN TECHNICAL LIBRARY

DIRECTOR
DEFENSE NUCLEAR AGENCY
WASHINGTON D.C. 20305
ATTN STTL TECH LIBRARY
ATTN STST ARCHIVES
ATTN DDST
ATTN SPSS

(2 COPIES)

(2 COPIES)

CHAIRMAN
DEPT OF DEFENSE EXPLO SAFETY BOARD
RM-GB270, FORRESTAL BUILDING
WASHINGTON D.C. 20301
ATTN DD/S+SS

DIR OF DEFENSE RSCH + ENGINEERING
WASHINGTON D.C. 20301
ATTN AD/SW
ATTN DD/TWP
ATTN DD/S+SS
ATTN AD/NP

COMMANDER
FIELD COMMAND
DEFENSE NUCLEAR AGENCY
KIRTLAND AFB, NM 87115
ATTN FCTA
ATTN FCTA-D

INTERSERVICE NUCLEAR WEAPONS SCHOOL
KIRTLAND AFB, NM 87115
ATTN TECH LIB

DIRECTOR
JOINT STRAT TGT PLANNING STAFF JCS
OFFUTT AFB
OMAHA, NB 68113
ATTN STINFO LIBRARY

WEAPONS SYSTEMS EVALUATION GROUP
400 ARMY NAVY DRIVE
ARLINGTON VA 22202
ATTN DOC CON

CHEIF OF RES, DEV + ACQUISITION
DEPARTMENT OF THE ARMY
WASHINGTON D.C. 20310
ATTN TECHNICAL LIBRARY
ATTN DAMA-CSM-N LTC E. DEBOESER JR

COMMANDER
HARRY DIAMOND LABORATORIES
WASHINGTON D.C. 20438
ATTN AMXDO-NP
ATTN AMXDO-TI TECH LIB

DIRECTOR
U S ARMY BALLISTIC RESEARCH LABS
ABERDEEN PROVING GROUND, MD 21005
ATTN TECH LIB-E. BAICY

COMMANDER
U S ARMY COMM COMMAND
FORT HUACHUCA, AZ 85613
ATTN TECHNICAL LIBRARY

COMMANDER
U S ARMY MAT + MECHANICS RSCH CTR
WATERTOWN, MA 02172
ATTN R SHEA

COMMANDER
U S ARMY NUCLEAR AGENCY
FORT BLISS, TX 79916
ATTN TECH LIB

COMMANDER
U S ARMY WEAPONS COMMAND
ROCK ISLAND ARSENAL
ROCK ISLAND, IL 61201
ATTN TECHNICAL LIBRARY

CHIEF OF NAVAL MATERIAL
NAVY DEPT
WASHINGTON D.C. 20360
ATTN MAT 0323

CHIEF OF NAVAL OPERATIONS
NAVY DEPARTMENT
WASHINGTON D.C. 20350
ATTN OP 03FG
ATTN OP 985F

CHIEF OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
ARLINGTON VA 22217
ATTN N PERRONE CD 474
ATTN TECHNICAL LIBRARY

OFFICER IN CHARGE
CIVIL ENGR LAB
NAVAL CONST. BATTALION CTR
PORT HUENEME CA 93041
ATTN R ODELLO
ATTN TECH LIB

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
NAVAL ELECTRONIC SYSTEMS COMMAND HQS
WASHINGTON D.C. 20360
ATTN PME 117-21A

COMMANDER
NAVAL FACILITIES ENGINEERING COMMAND
HEADQUARTERS
WASHINGTON D.C. 20390
ATTN TECHNICAL LIBRARY

SUPERINTENDENT
NAVAL POSTGRADUATE SCHOOL
MONTEREY CA 93940
ATTN CODE 2124 TECH RPTS LIBRARIAN

DIRECTOR
NAVAL RESEARCH LABRATORY
WASHINGTON D.C. 20375

ATTN CODE 2027 TECHNICAL LIB
ATTN CODE 840 J GREGORY
ATTN CODE 8440 F ROSENTHAL
ATTN CODE 8403A G OHARA
ATTN CODE 8442 H HUANG

(3 COPIES)

(4 COPIES)

COMMANDER
NAVAL SEA SYSTEMS COMMAND
NAVY DEPARTMENT
WASHINGTON D.C. 20362

ATTN ORD - 91313 LIB
ATTN CODE 03511 C POHLER

COMMANDER
NAVAL SHIP RSCH AND DEVELOPMENT CTR
UNDERWATER EXPLOSIONS RSCH DIVISION
PORTSMOUTH V.A. 23709

ATTN E PALMER
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING
HYATTSVILLE MD 20782

ATTN NSEC 6120D
ATTN NSEC 6110.01
ATTN NSEC 6105G
ATTN NSEC 6105
ATTN 6105C1
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL SHIP RESEARCH AND DEV CENTER
BETHESDA MD 20034

ATTN CODE 17 WW MURRAY
ATTN CODE 142-3 LIBRARY
ATTN CODE 174
ATTN CODE 11
ATTN CODE 2740 Y WANG
ATTN CODE 1962
ATTN CODE 1903
ATTN CODE 1731C
ATTN CODE 1171
ATTN CODE 19

COMMANDER
NAVAL SURFACE WEAPONS CENTER
WHITE OAK
SILVER SPRING MD 20910

ATTN CODE 241 J PETES
ATTN CODE 1224 NAVY NUC PRGMS OFF
ATTN CODE 730 TECH LIB
ATTN CODE 240 H SNAY
ATTN CODE 243 G YOUNG

COMMANDER
NAVAL SURFACE WEAPONS CENTER
DAHLGREN LABORATORY
DAHLGREN VA 22448
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL UNDERSEA CENTER
SAN DIEGO, CA 92152
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL WEAPONS CENTER
CHINA LAKE CA 93555
ATTN CODE 533 TECH LIB

COMMANDING OFFICER
NAVAL WEAPONS EVALUATION FACILITY
KIRTLAND AIR FORCE BASE
ALBUQUERQUE NM 87117
ATTN TECHNICAL LIBRARY

DIRECTOR
STRATEGIC SYSTEMS PROJECTS OFFICE
NAVY DEPARTMENT
WASHINGTON D C 20376
ATTN NSP-272
ATTN NSP-43 TECH LIB

AF CAMBRIDGE RSCH LABS, AFSC
L.G. HANSCOM FIELD
BEDFORD MA 01730
ATTN SUOL AFCRL RSCH LIB

HEADQUARTERS
AIR FORCE SYSTEMS COMMAND
ANDREWS AFB
WASHINGTON D C 20331
ATTN TECHNICAL LIBRARY

COMMANDER
ARMAMENT DEVELOPMENT&TEST CENTER
ELGIN AFB FL 32542
ATTN TECHNICAL LIBRARY

LOS ALAMOS SCIENTIFIC LAB
P O BOX 1663
LOS ALAMOS NM 87544
ATTN DOC CONTROL FOR REPORTS LIB

SANDIA LABS
LIVERMORE LAB
P O BOX 969
LIVERMORE CA 94550
ATTN DOC CON FOR TECH LIB

SANDIA LABORATORIES
P.O. BOX 5800
ALBUQUERQUE NM 87115
ATTN DOC CON FOR 3141 SANDIA RPT COLL

U S ENERGY RSCH & DEV ADMIN
DIVISION OF HEADQUARTERS SERVICES
LIBRARY BRANCH G-043
WASHINGTON D C 20545
ATTN DOC CONTROL FOR CLASS TECH LIB

UNIV OF CALIFORNIA
LAWRENCE LIVERMORE LAB
P.O. BOX 808
LIVERMORE CA 94550
ATTN TECHNICAL LIBRARY

AGBABIAN ASSOCIATES
250 NORTH NASH STREET
EL SUGONDO CA 90245
ATTN M AGBABIAN

BATTELLE MEMORIAL INSTITUTE
505 KING AVENUE
COLUMBUS OH 43201
ATTN TECHNICAL LIBRARY

BELL TELEPHONE LABORATORIES INC.
MOUNTAIN AVE
MURRAY HILL NJ 07974
ATTN TECH RPT CTR

BOEING COMPANY
P.O. BOX 3707
SEATTLE WA 98124
ATTN AEROSPACE LAB

CAMBRIDGE ACOUSTICAL ASSOC
1033 MASSACHUSETTS AVE
CAMBRIDGE MA 02138
ATTN M JUNGER

CIVIL / NUCLEAR SYSTEMS CORP
1200 UNIVERSITY N. F.
ALBUQUERQUE NM 87102
ATTN T DUFFY

ELECTRIC BOAT DIV
GENERAL DYNAMICS CORP.
GROTON CN 06340
ATTN L. CHEN

GENERAL ELECTRIC CO.
TEMPO-CENTER FOR ADVANCED STUDIES
816 STATE STREET (P.O. DRAWER QQ)
SANTA BARBARA CA 93102
ATTN DASIAC

ITT RESEARCH INST
10 WEST 35TH ST
CHICAGO IL 60616
ATTN TECHNICAL LIBRARY

INST FOR DEFENSE ANALYSIS
400 ARMY NAVY DRIVE
ARLINGTON VA 22202
ATTN IDA LIBRARIAN R SMITH

J.L. MERRITT
CONSULTING + SPECIAL ENGR SVS INC
P.O. BOX 1206
REDLANDS CA 92373
ATTN TECHNICAL LIBRARY

KAMAN AVIDYNE
DIV OF KAMAN SCEINCES CORP
83 SECOND AVE
NW INDUSTRIAL PARK
BURLINGTON MA 01803
ATTN E CRISCIONE
ATTN TECHNICAL LIBRARY
ATTN G ZARTARIAN

KAMAN SCIENCES CORP.
P.O. BOX 7463
COLORADO SPRINGS CO 80933
ATTN TECHNICAL LIBRARY

LOCKHEED MISSILES AND SPACE CO.
3251 HANOVER ST
PALO ALTO CA 94304
ATTN TECH INFO CTR D/COLL
ATTN T GEERS D/52-33 BLDG 205

NATHAN M. NEWMARK
CONSULTING ENGINEERING SERVICES
1114 CIVIL ENGINEERING BLDG
URBANA IL 61801
ATTN N NEWMARK

POLYTECHNIC INST OF NEW YORK
DEPT OF APPLIED MECH
333 JAY STREET
BROOKLYN NY 11201
ATTN J KLOSNER

R+D ASSOCIATES
P.O. BOX 3580
SANTA MONICA CA 90403
ATTN TECHNICAL LIBRARY

STANFORD RESEARCH INST
333 RAVENSWOOD AVE
MENLO PARK CA 94025
ATTN SRT LIB ROOM G021
ATTN B GASTEN
ATTN G ABRAHAMSON

TETRA TECH INC.
630 N ROSEMEAD BLVD
PASADENA CA 91107
ATTN LI-SAN HWANG
ATTN TECH LIB

THE BDM CORP
1920 ALINE AVE
VIENNA VA 22180
ATTN TECH LIB

UNIV OF MARYLAND
DEPT OF CIVIL ENGR
COLLEGE PARK MD 20742
ATTN B BERGER

URS RESEARCH CO.
155 BOVET RD.
SAN MATEO CA 94402
ATTN TECH LIB

WEIDLINGER ASSOCIATES
3000 SAND HILL ROAD
BUILDING 4 SUITE 245
MENLO PARK CA 94025
ATTN J. ISENBERG

WEIDLINGER ASSOCIATES
110 EAST 59TH STREET
NEW YORK, NY 10022
ATTN DR. M. BARON

ASSISTANT CHIEF FOR TECHNOLOGY
OFFICE OF NAVAL RESEARCH
ARLINGTON, VIRGINIA 22217
ATTN CODE 200

TELEDYNE BROWN ENG.
MAIL STOP 44
300 SPARKMAN DRIVE
RESEARCH PARK
HUNTSVILLE, ALABAMA 35807
ATTN DR. MANU PATEL

DIRECTOR
U S ARMY WATERWAYS EXPERIMENT STN
P.O. BOX 631
VICKSBURG MS 39180
ATTN J STRANGE
ATTN W FLATHAU
ATTN TECH LIB (UNCL ONLY)

AF INSTITUTE OF TECHNOLOGY, AU
WRIGHT PATTERSON AFB, OH 45433
ATTN LJB AFIT BLDG 640 AREA B(UNCL ONLY)

NKF ENGINEERING ASSOCIATES, INC.
8720 GEORGIA AVENUE
SILVER SPRING, MD. 20910
ATTN DR. R.O. BELSHEIM

M&T CO.
2130 ARCH STREET
PHILADELPHIA, PA. 19103
ATTN B. McNAIGHT